



## Stainless steel BIGFLOW EVO hand dryer with electronic sensor. Satin finish

### Description

- Automatic electronic hand dryer.
- Surface mounted model.
- Stainless steel plate housing, satin finish.
- Also available in gloss finish (NOFER 01481.B), white finish (NOFER 01481.W), black finish (NOFER 01481.N) and white plastic (NOFER 01491.W).
- Suitable for communities and places of high frequency of use.
- Robust, vandal resistant and safe because it is built without sharp edges or other dangerous elements.
- Conforms to European safety directives (CE).

### Suggested text for prescription

NOFER hand dryer, with AISI 304 stainless steel casing, satin finish, hot air driven by electronic sensor, 2050 W power and temperature of 60°C. Motor speed 2800 rpm. Dimensions: 284 height x 218 width x 102 depth (mm).

### Components

- Housing made of a single piece of AISI 304 stainless steel.
- Infrared electronic sensor that stops the hand dryer when hands are removed from the detection field.
- With safety thermal limiter and automatic stop in case of vandalism.

### Operation

Place your hands under the device. The hand dryer is automatically activated and remains in operation as long as the hands are within the sensor field. The device switches off a few seconds after the hands are removed.


### Cleaning

Cleaning with a cotton cloth slightly moistened in a soapy solution is recommended. Then dry.

### Technical characteristics

- Material:** AISI 304 stainless steel  
**Finishing:** Satin  
**Thickness:** 1.2 mm  
**Air outlet temperature:** at an ambient temperature of 20°C, T<sup>a</sup>: 60°C  
**Motor type:** Universal brushless (maintenance-free)  
**Motor speed:** 2800 r.p.m.  
**Air velocity:** 65 km/h  
**Air flow rate:** 2300 l/min  
**Total power:** 2050 W (optional 1450 W)  
**Engine power:** 110 W  
**Voltage/Frequency:** 220-240 V - 50/60 Hz  
**Electrical insulation:** Class II  
**Distance to the sensor:** 10-50 cm (with possibility of regulation)  
**Consumption:** maximum of 9 A  
**Sound level at 2 meters:** 60 dBA  
**Projection protection index:** IPX1  
**Dimensions:** 284 height x 218 width x 102 depth (mm)  
**Total net weight:** 2.73 kg  
**Estimated drying time:** 40 seconds  
**Adjustable time:** from 0 to 90 seconds (by potentiometer)

### Dimensional drawing

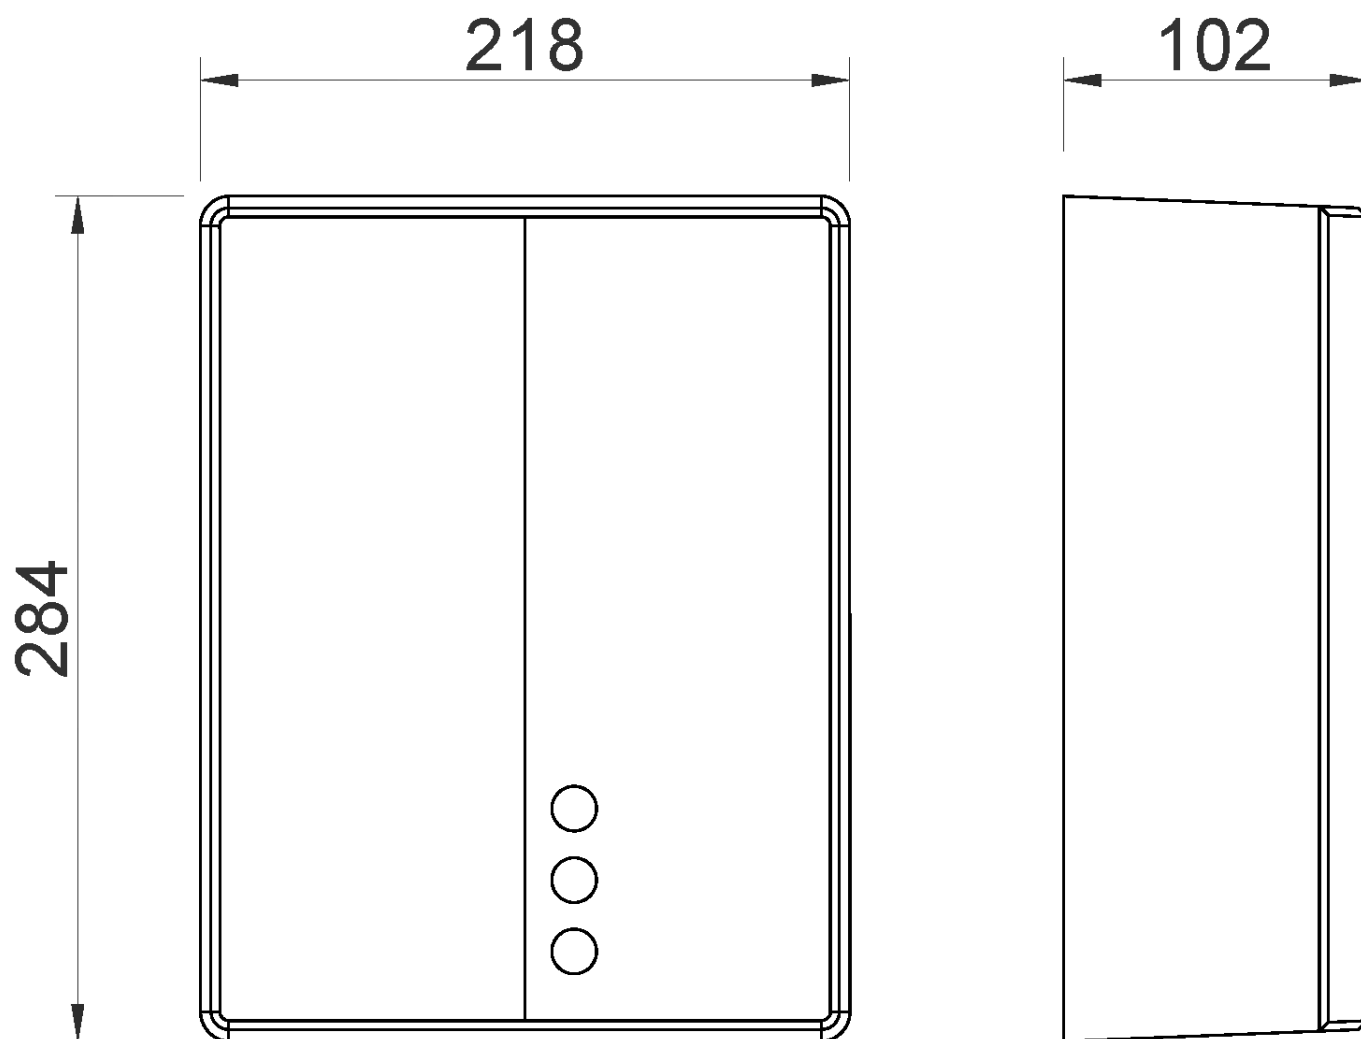

Ctra. Laureà Miró, 385-387  
08980 | Sant Feliu de Llobregat,  
Barcelona - Spain  
T. +34 934 742 423  
F. +34 934 743 548  
nofer@nofer.com  
www.nofer.com

RELATED  
PRODUCTS



01481.B



01481.W

These specifications may be modified and/or amended due to manufacturing requirements.